2-Color Long Line Striper



Plural Component All Electric Pavement Marking Truck

(2) Pump Modules - (1) Yellow, (1) White

EnDiSys BIG ACE Pump

- Largest pump in the industry
- 2:1 Mix Ratio
- Inlet Screens for Resin and Catalyst
- High PSI Relief Valves
- Circulation Capability from Preheaters to Tank
- 3,000 Max Fluid Pressure
- 19 GPM @ 40 CPM

Electrically Driven Heat Exchangers

- 20.4K Watts for Resin
- 10.2K Watts per Catalyst
- Independently Monitored and Controlled per Zone
- 10.2K White Resin 5.1K Cat

• (3) 20Ft Electrically Heated Hose Assemblies

- 3/8" I.D. Nylon Core Hose for Resin
- 5/16" I.D. Nylon Core Hose for Cat
- 1/4" Air Tubing to Control Gun
- Scuff Jacket

• (1) 50FT Electrically Heated Hose Assembly for White Hand Work

(1) Manual Air Purge Impingement Fusion Gun for Hand Work

- 2:1 Ratio Mix Chamber
- Airless Tip

Communication System (Wireless)

- (2) Wireless Headsets
- AC/DC Charger

Camera System

- (2) Cameras on Adjustable Mounts
- In-Cab Monitor

Power Plant - Integrated Assembly Packaged into One Self-Contained Module

• 125 HP John Deere Diesel Tier 4

- Liquid Cooled
- Easy to Service
- Low Oil Pressure Alarm
- High Temp Alarm
- Hour Meter
- Fuel Sourced from Chassis

• Hydraulic Pump System

- Variable Displacement Pressure Compensated Piston Pump
- 35 GPM Max Flow Rating
- 1,800 PSI Max Pressure
- 40 Gallon Resevoir
- Integrated Oil Cooler

Integral Screw Air Compressor

- 175 CFM at 100 PSI
- Direct Driven from Power Plant
- 30 Gallon ASME Air Tank
- Filter/Separator
- After Cooler & Auto Tank Drain

• 65 KW Generator

- 208 VAC 3-Phase Power
- 125 Amperes

Material Load Pumps

- Hydraulically Driven Pumps
- Pump Outlets Plumbed to Storage Tank Inlets
- Color Coded
- Hydraulic Control Load/Unload Manifold

(3) 200-Gallon Heated Storage Tanks

- (1) Catalyst, (1) Yellow, (1) White
- ASME Rated Tank
- 2.0" NPT Bottom Outlet
- White Painted Carbon Steel
- Glycol Skirted Base with 3,000 Watt Immersion Heater
- Expansion Tank for Glycol
- Heaters Wired to 120VAC/20A Shore Power Switch
- · Fuel Sourced from Chassis
- Heated Inlet Hoses

(1) 350-Gallon Bead Storage Tank & (1) 350-Gallon Split Element Tank

- ASME Rated Tank
- 2.0" NPT Bottom Outlet
- White Painted Carbon Steel
- Automated Scale System Tied into Skip Line Control
- Vacuum Tank Fill System

Driver Side Carriage

- (2) Graco AutoFusion Spray Guns
 - ♦ 2:1 Mix Ratio Mix Chamber
 - ♦ Airless Tip
 - ♦ Electric Manifold Heater
- (2) Remotely Driven Gun Adjusters
- 3-Foot Carriage Travel Range
- (4) Bead Gun Applicators

Curb Side Carriage

- (1) Graco AutoFusion Spray Gun
 - ♦ 2:1 Mix Ratio Mix Chamber
 - ♦ Airless Tip
 - ♦ Electric Manifold Heater
- (1) Remotely Driven Gun Adjusters
- 3-Foot Carriage Travel Range
- (2) Bead Gun Applicators

Email: Info@endisys.com Website: www.endisys.com



Home Office

14329 Northdale Blvd, Rogers, MN 55374 Voice: 763.428.5075 Fax: 763.428.5078

Illinois Office.


120 Industrial Drive, Gilberts, IL 60136 Voice: 847.844.1854 Fax: 847.844.1857

Ohio Office

2962 Township Road 97, McComb, OH 45858 Voice: 763.286.4821 Fax: 763.428.5078





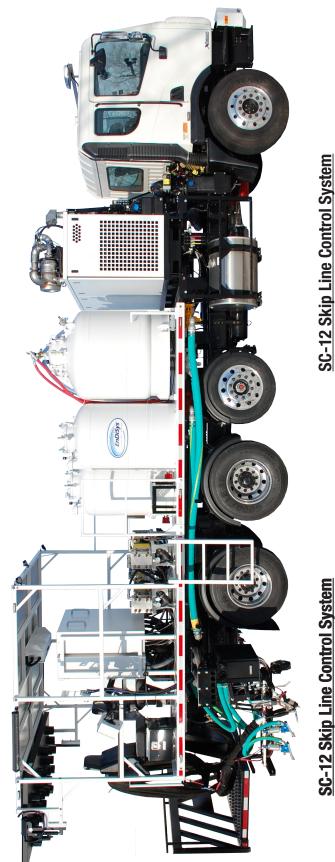

SC-12 Skip Line Control System

Integrated Data • GPS with Built in WIFI Logging • Additional Ontions

Additional Options Available

Online Report Generator Video Overlay & Crosshair Advanced Pattern Configuration

Real Time Monitoring

Bead Monitoring (2 Tanks)

Control Peripheral Functions

Gun Blow Air Switch Four Gun Control

Tandem Bead Switch

Gun Height Adjustor

In-Field Software Updates

Internal Pulse Multiplier **Guided Calibration Full Color Display** Pattern Preview

Home Office 14329 Northdale Blvd Rogers, MN 55374

Tel: 763-428-5075 Fax 763-428-5078

EnDiSys

Illinois Office 120 Industrial Drive Gilberts, IL 60136

Tel: 847-844-1854 Fax 847-844-1857

Ohio Sales Office 2962 Township Road 97 McComb, OH 45858

Tel: 763-286-4821 Fax: 763-428-5078 **Customer Service** 763-428-5075

Fax 763-428-5078 techservice@endisys.com