

# 98:2 MMA Portable Sprayer



## MMA Portable Sprayer

**DESCRIPTION**      **PART #:**

**MMA Walk-Behind**      **2006944**

**SPECIFICATIONS:**


**MAX TIP SIZE:**      **0.047 1-Gun**

**MAX GPM (LPM):**      **2.15 (8.14)**

**MAX PSI (BAR):**      **3300 (227)**

**HONDA GX  
ENGINE CC (HP):**      **390 (13)**

**WEIGHT  
EMPTY LBS (KG):**      **675 (307)**

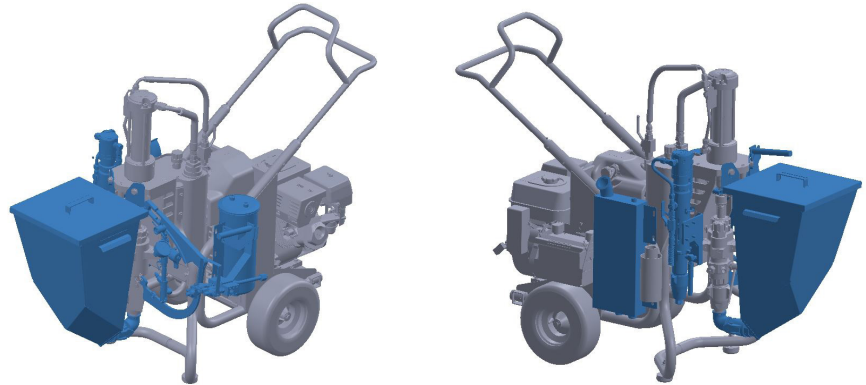

## Electric Clutch System

Disengages engine for fast starting.

## Honda® 390 GX Engine

Industry proven performance with the most demanded engine by contractors.

## 115 Xtreme Pump

Long life pump provides precise flow for spraying with MMA.

## Mix Manifold

Easily removable for precise stencil work.

## Graco Hydraulic Motor System

Graco's no-stall hydraulic motor for uninterrupted performance.

## BPO SST Graco Pump

Engineered for superior ratio control. Adjustments from 1.5 to 4.0%.

## Flushable Static Mixer Assembly

Manifold is designed to prevent cross-over contamination and is easily flushable.

## Solvent Flush System

2-Gallon (8 L) reservoir and air-operated-double diaphragm pump provides pressurized flushing capability of manifold, hose assembly and gun.

## 2 Gallon (8 L) BPO SST Tank

Stainless steel encased tank to shield bpu from UV rays.

## 12 Gallon Stainless Steel Hopper

Extended striping time with large capacity hopper.

# ACCESSORIES

## SPARE PARTS KIT

2006064 Spare Parts Kit



		98:2 MMA Liner
<b>MODEL</b>	Part Number	2006944 GH Series
<b>SPECIFICATIONS</b>	Maximum Tip Size	0.047
	Maximum psi (bar)	3300 (227)
	Maximum gpm (lpm)	2.15 (8.14)
	Honda GX Engine cc (hp)	390 (13)
	Weight lbs (kg)	675 (307) Empty
		875(398) Loaded
Applications	Roofing / Pavement Marking	
<b>INCLUDES</b>	Gun	Graco Airless Gun with External Spring
	Hose	1/2in x 50ft - A (12.7mm x 15m) 3/16in x 50ft - B (4.8mm x 15m) with 1/4 in x 44 in Whip (6.4 mm x 1.1 m) after static mix block
	Tip	MMA Liner RAC 5 SwitchTip
	Filter	50 Mesh Easy Out
<b>RESIN PUMP</b>	Type	Xtreme 115cc
	Rod	Chromex
	Cylinder	Hard Chrome
	Packings	UHMW/PTFE
<b>BPO PUMP</b>	Pump	SST Slave
<b>FUEL TANK</b>	Fuel Capacity gal (ltrs)	1.5 (5.7)
<b>FLUSH SYSTEM</b>	Max PSI	3300
	Reservoir	2 Gallon
<b>SUPPLY</b>	Resin Side	12 Gallon Hopper
	BPO Side	SST Tank 2 Gallon (7.6 L)



**Home Office**  
14329 Northdale Blvd  
Rogers, MN 55374

Tel: 763-428-5075  
Fax 763-428-5078

**Illinois Office**  
120 Industrial Drive  
Gilberts, IL 60136

Tel: 847-844-1854  
Fax 847-844-1857

**Ohio Sales Office**  
2962 Township Road 97  
McComb, OH 45858

Tel: 763-286-4821  
Fax: 763-428-5078

**Customer Service**  
763-428-5075  
Fax 763-428-5078  
techservice@endisys.com