EnDiSys
FLUID DELIVERY SYSTEMS

An Engineered Distribution Specialties, LLC Company

Spray Foam Rig Systems

The EnDiSys Spray Rigs are designed to meet the rigorous environment encountered by contractors. Customization can be done based on specific customer requests.

-TRAILER SPECS

- Twin 3,500 lb Torsion Axles (GVWR 6990)
- 5" Main Beams
- 12" On Center Cross Members
- 3/4" Advantech Flooring
- 3/8" Plywood Walls
- Insulated Walls and Ceilings
- Finished Ceiling Liner
- 7'4" Ceiling Height
- Aluminum Stoneguard
- Cam-lock Rear Barn Style Door
- Cam-lock Style Latch on Curbside Door
- Roof Vent
- 12 VDC Lights with Switch
- Heavy Duty Crank Jack
- Limited 5 Year Warranty
- 7' Trailer Width
- Rivet-less Construction

-STANDARD COMPONENTS

- Spray Foam Insulated Dividing Wall
- Custom Hose Hanger with 210' hose
- Rooftop AC
- Color Coded Drum Restraints
- Fire Extinguisher
- Eye Wash Station
- First aid kit

-FLUID/AIR HANDLING ACCESSORIES

- T1 Supply Pump Package
- Recirculation kit from Reactor to Drums

-ELECTRO PNEUMATIC SYSTEM

- 25kw NextGen Generator with Kubota 4 Cylinder Turbocharged Diesel Engine
- High Temp and Low Oil Pressure shut-down
- Hour Meter
- Glow Plugs for Cold Starting
- 20 CFM Integral Piston Compressor with Heat Exchanger
- 30 Gallon Air Receiver Tank
- Air Regulator with oil/water separator
- Air Dryer
- Shore Power w/ Transition Switch
- 125 Amp Distribution Box
- One GFI Outlet
- Light Fixtures

-GRACO EQUIPMENT

- E-20 230V 3 phase 6.0kw Heaters
- 200 ft hose
- 10 ft WIP
- Air Purge Fusion Gun

-BREATHABLE AIR SYSTEM

- 3 Stage Filter System 2 Worker System
- (2) Sealed Full Masks
- Tear-away lenses
- (2) hose hangers with 200ft of breathable air hose

-Option

- E-30 230V 3 phase 10.2kw Heaters
- Additional 100 ft hose with this reactor

14329 Northdale Blvd, Rogers, MN 55374
Voice: 763.428.5075 Fax: 763.428.5078
E-mail: info@endisys.com
www.endisys.com

An Engineered Distribution Specialties, LLC Company

Spray Foam Rig Systems

Typical Layout for Standard Trailer Systems. These can be adjusted to meet specific customer requirements. Custom trailer sizes are available with addition 3 week lead time. This unit with (2) sets of material can be towed by a half ton pick-up

12 Ft V-Nose Bumper

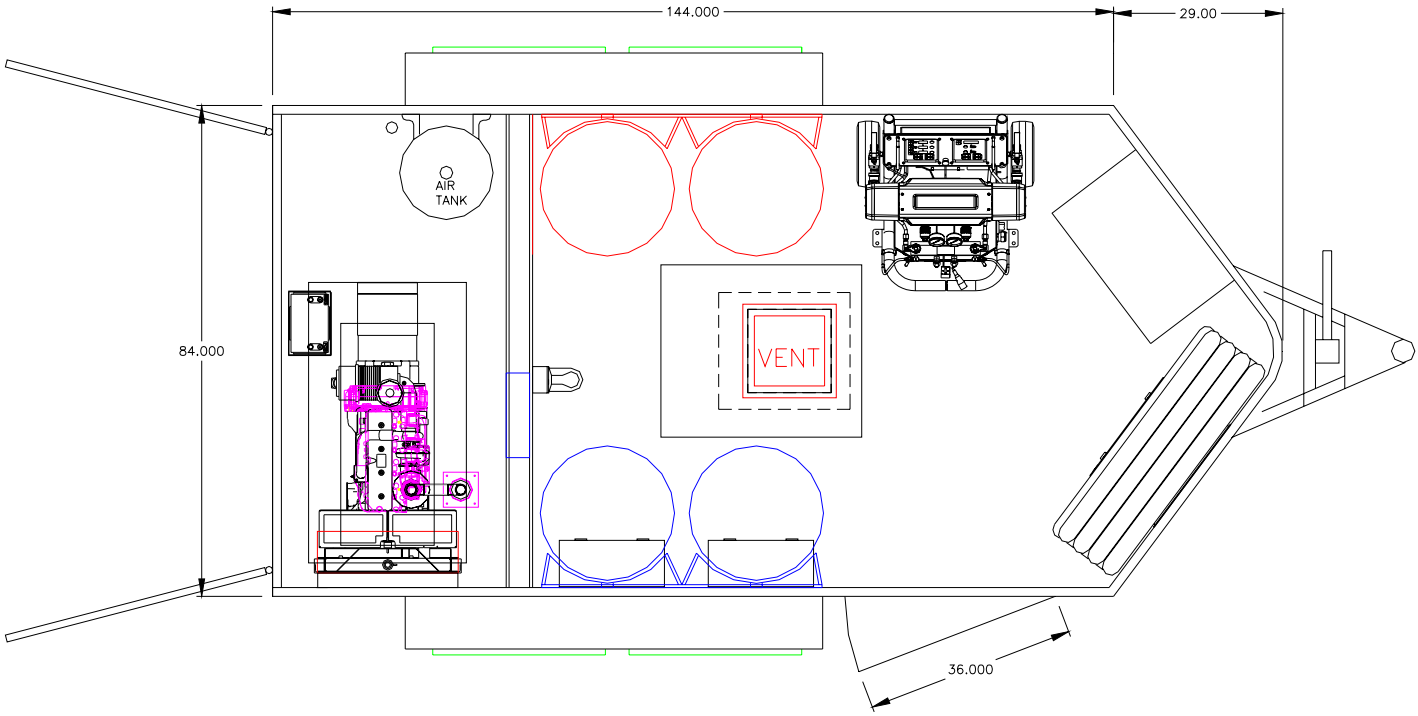

14329 Northdale Blvd, Rogers, MN 55374
Voice: 763.428.5075 Fax: 763.428.5078
E-mail: info@endisys.com
www.endisys.com