

# 2:1 Heated Liner

## Pavement Marking Machine



### 2:1 Heated Liner

**DESCRIPTION**      **PART #:**

2:1 Heated Liner      2006168

**SPECIFICATIONS:**


**MAX TIP SIZE:**      0.055 1-Gun

**MAX GPM (LPM):**    2.5 (9.5)

**MAX PSI (BAR):**     3300 (227)

**HONDA GX  
ENGINE CC (HP):**    390 (13.0)

**WEIGHT LBS (KG):**  1400 (635)

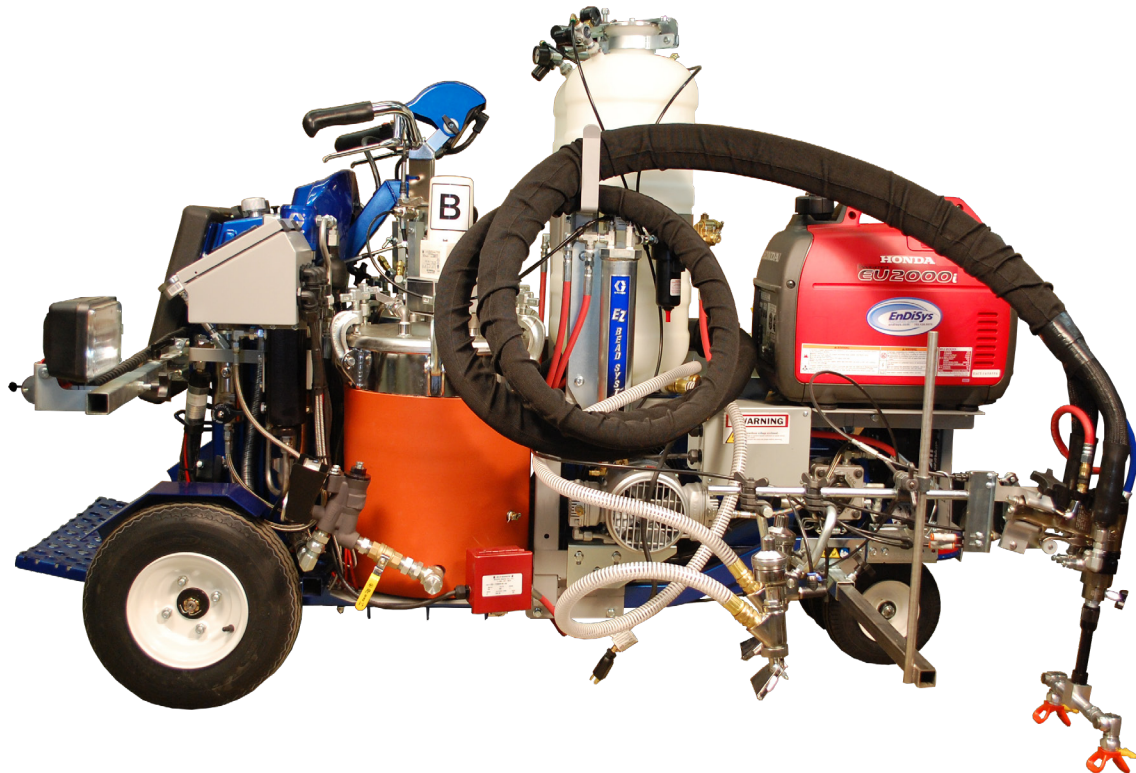

### Programmed EnDiSys Monitor

For ratio assurance and flush timer.

### Automatic Gun Control System

Manual or automatic paint and bead guns with the push of a button.

### Electric Clutch System

Disengages engine for fast starting.

### (2) 8 Gallon (30 L) Heated Pressure Pots

Electrically heated glycol base jacketed tanks with insulation wrap and electric agitators.

### Honda® 13 HP GX Engine

Industry proven performance with the most demanded engine by contractors.

### Graco Hydraulic Motor System

Graco's no-stall hydraulic motor for uninterrupted performance.

### EnDiSys 2:1 Solvent Purge Static Mix Fusion Gun

Gun configuration is a power performer in the pavement marking industry. Optional splitter attachment allows for application of double yellow on roadways and bridgedecks.

### Portable Generator

2KW capacity to power tank heaters, preheaters and agitators.

### Endurance Piston Pump System

Long life pump provides precise flow for striping with epoxies or polyureas.

### Electrically Jacketed Heated Hose Assembly

20' length with circulation hoses to allow hand work.

### Self-Centering Front Wheel

Eliminates one user interface for simpler operation.

### Pressurized Bead System

Consistent pressurized delivery of beads through Graco's standard bead module.

### Material preheaters

High pressure heaters to maintain consistent material viscosities.

### Auto-Layout System

New automatic gun system allows marking to be done with guns rather than with the assistance of aerosol cans.

### Ratio Assurance Monitor

Automatically monitors fluid to match mix ratios.

# ACCESSORIES

		2:1 Heated Liner
<b>MODEL</b>	Part Number	2006168 2:1 Heated Liner w/Beads
<b>SPECIFICATIONS</b>	Maximum Tip Size	0.055
	Maximum psi (bar)	3300 (227)
	Maximum gpm (lpm)	2.50 (9.5)
	Honda GX Engine cc (hp)	390 (13.0)
	Dry Weight lbs (kg)	1400 (635)
	Applications	Pavement
<b>INCLUDES</b>	Gun	2:1 Fusion Static Mix
	Hoses	3/8 in x 20 ft - A (9.5 mm x 6 m) 5/16 in x 20 ft - B (17.9 mm x 6 m)
	Tip	Airless Flat Spray Tip
	Filter	50 Mesh Easy Out
<b>PUMP</b>	Type	QuikChange System
	Intake	QuikAccess
	Rod	Chromex
	Cylinder	Hardened SST
	Packings	UHMW/TEFLON
<b>TRACKING FUEL TANK</b>	Tracking System	N/A
	Fuel Capacity gal (ltrs)	1.40 (5.3)
<b>FLUSH SYSTEM</b>	Max PSI	1500 PSI Solvent Flush
	Reservoir	2 Gallon
<b>BEAD TANK</b>	Bead Tank, EA	140 lbs (64)
	Compressor	1.7 HP (6 CFM)
<b>RESIN SUPPLY</b>	A Side	Pressure Pot w/Agitator 8 Gallon (30.3L)
	B Side	Pressure Pot w/Agitator 8 Gallon (30.3L)
<b>BPO</b>	A - Resin Pump	Endurance Pump
	B - Activator Pump	Endurance Pump

## DESICCANT ISO KIT

**2006165** Desiccant ISO Kit

## REPLACEMENT DESICCANT 1 LB

► Compact, durable, faster, straighter and easy to use

**1011680** Desiccant 1 LB

## REPLACEMENT DESICCANT 2 LB

**1011681** Desiccant 2 LB

## SPARE SOLVENT PURGE GUN

**2006186** Spare Solvent Purge Gun

## SECOND GUN KITS

**16R963** 2nd Bead Gun Kit (tank not included)

## DOUBLE DROP WITH 2ND TANK & GUN

**2006061** Double Drop With 2nd Tank & Gun

## ADJUSTABLE MECHANICAL POINTER WITH WHEEL

**2006233** Adjustable Line Pointer Guide

## ENDISYS LINER GUIDANCE LASER

► Compact, durable, faster, straighter and easy to use

**2006108** Laser Line Generator

## 6MM LENS CAMERA KIT

**2006182** Camera Kit With 6mm Lens

## HAND BEAD STENCIL KIT

► For use with 2:1 Liner

**238957** Hand Bead Stencil Kit

(Use with the EZ Bead Pressurized Dispensing System Only)

*Includes: (1) Bead Gun, (2) 3/4" x 24' Clear Hoses, .234in / .35 degree Tip, 1' Extension Tube and Mounting Brackets*

## DUAL SPREAD HEAD KIT

**2006177** Dual Spread Head Kit

## SPARE PARTS FOR 2:1 LINELAZER

**2006183** Spare Parts Kit



**Home Office**  
14329 Northdale Blvd  
Rogers, MN 55374

Tel: 763-428-5075  
Fax 763-428-5078

**Illinois Office**  
120 Industrial Drive  
Gilberts, IL 60136

Tel: 847-844-1854  
Fax 847-844-1857

**Ohio Sales Office**  
2962 Township Road 97  
McComb, OH 45858

Tel: 763-286-4821  
Fax: 763-428-5078

**Customer Service**  
763-428-5075  
Fax 763-428-5078  
techservice@endisys.com